


# A & L Electric Sales

*Tomorrows lighting for a Greener Planet*

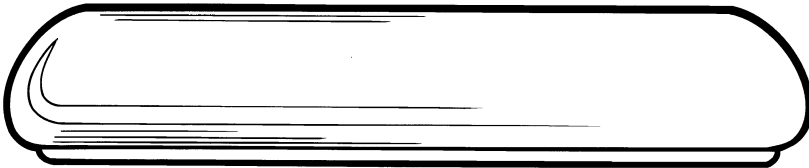

## Wall Cloud Bracket 2', 3', 4'

**Housing:** Die-formed heavy gauge steel with high-gloss baked white enamel finish (minimum reflectance 86%) over rust inhibiting phosphate coat.

**Shielding:** Translucent white acrylic diffuser.

**Electrical:** Fluorescent wired for 120V, 60Hz AC operation, thermally protected, Class P, sound rated A, energy saving ballast, unless otherwise specified. Magnetic T12 shall be high power factor. Electronic T8 shall be high power factor, instant start, <20% harmonic distortion standard, specify suffix UNV for <10% harmonic distortion. Specify suffix UNV for universal voltage, 120 through 277V, 50/60Hz AC operation, Electronic T8 only. UL and C-UL listed.

**Mounting:** Wall mount. Cloud mounts with brass acorn nut, leave 3" for installation and maintenance.

**Critical Application:** V&J strives to offer the most current product designs and value. Consequently, all V&J products are subject to redesign and revision. Critical applications such as size, operating temperature, or sensor operation should be confirmed with the factory.

Catalog No.	Lamps	Voltage	Length	Type
F-CF117	1 T8	120V-277V	24"	Bi-pin Shunted
F-CF125	1 T8	120V-277V	36"	Bi-pin Shunted
F-CF132	1 T8	120V-277V	48"	Bi-pin Shunted
F-CF217	2 T8	120V-277V	24"	Bi-pin Shunted
F-CF225	2 T8	120V-277V	36"	Bi-pin Shunted
F-CF232	2 T8	120V-277V	48"	Bi-pin Shunted