

LED Panel Light



Features



- PMMA light guide plate in optical grade, radiator plate with high quality aluminum alloy.
- Energy-efficient, light uniformity.
- Safety, no risk of electric shock.
- External high efficiency IC driver, DC Working.

Product Description

Widely used in office, hotels, shopping malls, subways, halls, schools, hospital, hallway and lounge, conference room etc.



Luminous Intensity Distribution:

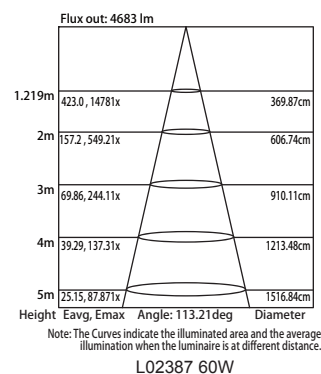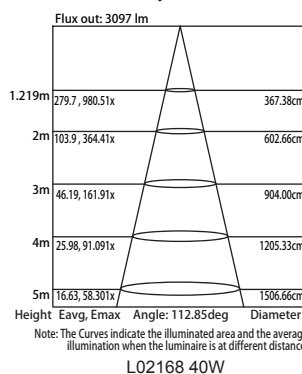

Item	Name	Power	Color Temperature	Lumen	PF	CRI	Life	Certificate
L02168	2'X2' LED Panel	40W	4000/5000K	4000LM	>0.9	>80	50000H	UL/DLC
L02387	2'X4' LED Panel	60W	4000/5000K	6000LM	>0.9	>80	50000H	UL/DLC

Volt: 100-277V

Beam Angle: 120°

0-10V Dimmable