




DL4 10W DIM Ra>90

FEATURES

- Replacement for 65W incandescent lamps
- Suitable for wet locations
- Dimmable down to 5%
- Flicker less than 12%
- Work with most of existing dimmer in market
- Contact us to get the dimmer list
- Three years limited warranty
- Not for emergency lighting

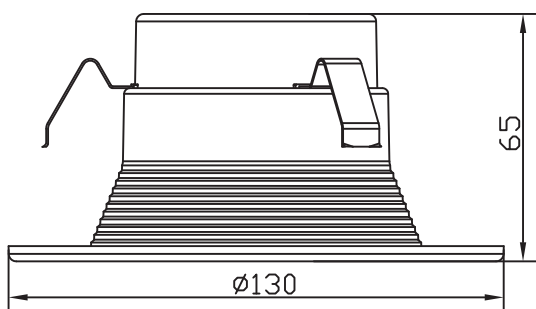

GENERAL SPECIFICATIONS

Form Factor	Operating Temperature	Electrical	Dimming and flicker
Length:130mm(5.12")	Minimum: -25°C(ambient)	Wattage: 10W	Dimmable to: <5%
Width:65mm(2.56")	Room Temperature 25 °C : 43°C-46°C (housing)	Power factor: >0.9	Flicker Index:0.03429
Weight: 132g	Maximum:40°C (ambient)	Voltage: 120V	Percent Flicker:11.39%
		Frequency: 60Hz	

SPECIFICATIONS BY MODEL NO.


Model#	SKU#	CCT(K)	Ra	Lumen	Efficacy	B.A.	Dim	Lifetime	Replace
DL4R10W12DIM90W30K	8007526	3000K	>90	682lm	68	100°	YES	50000H	65W
DL4R10W12DIM90W50K	8007540	5000K	>90	809lm	80	100°	YES	50000H	65W

PHOTOMETRIC INFORMATION

ZONAL LUMEN SUMMARY

Zone	Lumens	% lum, lamp
0-30	254.6	35.2
0-40	404.5	55.8
0-60	634.4	87.6
0-90	708.2	97.8


LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

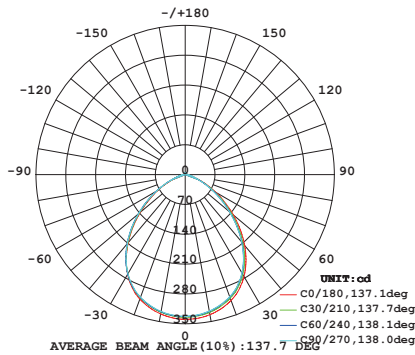

LUMINOUS DISTRIBUTION INTENSITY DATA

C (DEG) \ γ (DEG)	0	10	20	30	40	50	60	70	80	90
0	339	337	336	335	334	333	333	333	332	332
5	338	336	334	333	332	332	331	331	330	330
10	334	331	329	328	327	327	326	326	325	325
15	326	324	321	320	319	318	318	317	317	317
20	314	312	310	309	307	307	306	306	305	305
25	298	296	294	292	291	290	289	289	289	289
30	276	274	271	270	268	268	267	267	266	266
35	249	246	244	242	241	240	239	239	238	238
40	217	215	212	210	209	208	207	206	205	206
45	183	181	178	176	174	173	172	171	170	171
50	148	146	143	142	139	138	137	137	135	136
55	114	112	109	108	106	105	104	103	103	103
60	82.1	81.0	78.7	77.7	76.0	75.2	74.2	74.1	73.3	73.5
65	54.4	53.8	51.9	51.3	50.1	49.6	49.0	49.0	48.5	48.8
70	31.0	30.6	30.0	30.1	29.9	30.0	29.7	29.8	29.6	29.9
75	18.2	18.0	17.9	18.1	18.1	18.4	18.5	18.7	18.6	18.7
80	9.85	9.82	9.81	10.2	10.4	10.9	11.2	11.7	11.9	12.0
85	2.95	3.00	3.05	3.26	3.59	4.12	4.32	4.55	5.26	5.89
90	1.52	1.54	1.52	1.54	1.53	1.55	1.54	1.56	1.57	1.56

ILLUMINANCE AT DISTANCE

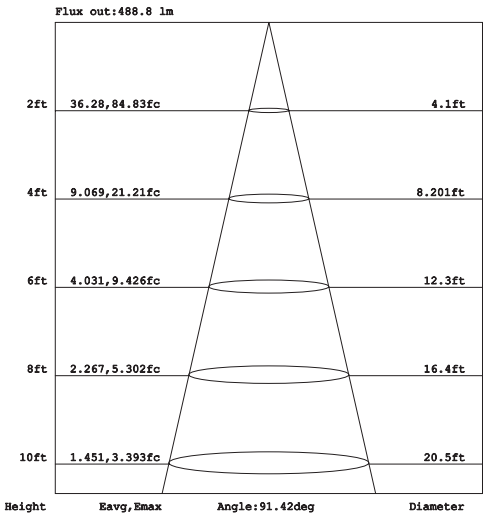

PHOTOMETRIC INFORMATION

