


A & L Electric Sales

Tomorrows lighting for a Greener Planet

Exit Sign Model RELXTE

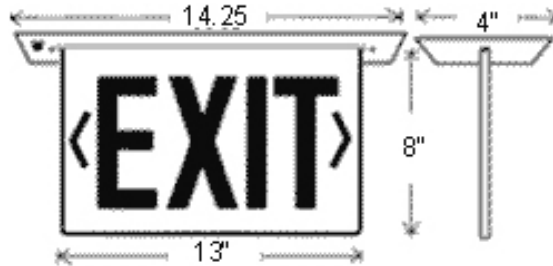

Features

- Compact, low-profile design.
- Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
- Emergency battery backup model (EM) is completely self-contained.
- Infield installable directional indicators.
- Standard AC and emergency units available.
- AC on indicator light and test switch (EM units only)
- Sealed lead battery on emergency (EM) units.
- 120/277 Volt Operation.

Ordering Information

Recessed Mount Unit

(Ex. Cat.# RELXTE1RCAEM)

Series	Number of Faces	Panel Color	Ceiling Trim Plate Finish	Operation
RELXTE	1-Single Face 2-Double Face	RC - Red on Clear GC - Green on Clear	W- White B - Black A - Anodized Aluminum	Blank - AC only EM - Battery Backup